

CLEAN STRIP  
NON-WOVEN



# DRUM WHEELS

## OPERATIONAL REMARKS

Open structure of the composition with an abrasive nylon fibers prevents clogging of tools and enables grinding without overheating.

### APPLIANCE:

- rust removal
- removing old paint and varnishing
- removing adhesive
- weld cleaning
- roughening of surface prior to bonding

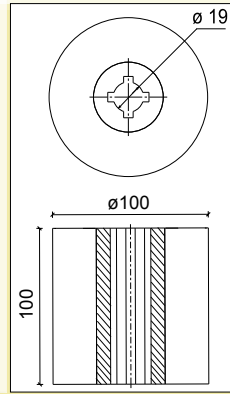

ø 100 x 100 mm CLEAN STRIP NON-WOVEN

n opt. [1/min]

n max [1/min]

• EXTRA COARSE

2.000 - 4.000

6.000

ABRASIVE  
CLOTH



# ANGLE GRINDERS

## OPERATIONAL REMARKS

High speed tools used for rust removal, removing old paint and varnishing.



M14 mount allows for mounting the tool directly to angle grinder's screw



ø 125 x 20 mm

CORUNDUM

### GRIDS

- 40   • 80   • 120   • 180   • 240   • 320
- 60   • 100   • 150   ○ 220   ○ 280

- - standard product
- - on individual order

n opt. [1/min]

n max [1/min]

6.000 - 8.000

12.200

NON-WOVEN  
WEB

ABRASIVE  
CLOTH




# POT SHAPED WHEELS

## OPERATIONAL REMARKS

Tools used for treatment with front surface. They ensure efficient treatment of relatively large surfaces.

Available mounting options:

- M14 screw
- Bosch-type mount

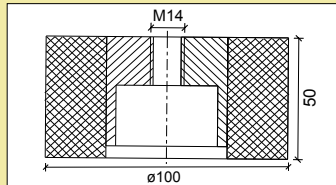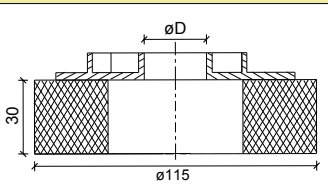

### GRIDS

#### NON-WOVEN WEB

- COARSE   • VERY FINE
- MEDIUM   • ULTRA FINE
- FINE   • EXTRA COARSE

#### NON-WOVEN + CLOTH

- COARSE / 80   • FINE / 180
- MEDIUM / 120   • VERY FINE / 240

### DIMENSIONS

DIAMETER [mm]

n opt. [1/min]

n max [1/min]

ø100

2000 - 4000

6000

ø115

1700 - 3400

5000

*Flap wheels, drum wheels  
angle wheels, pot shaped wheels*